INSTALLATION INSTRUCTIONS

Item#1541 (New. 08/29/2013)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (A) to the outlet box using mounting screws (C) (Size: #8-32N*L0.5”). The side of the mounting Plate marked “GND” must face out.
4. Determine the desired hanging height and thread rods (F) to metal frame (G). Carefully pass the wires through each rod as you assemble. Then attach loop (E) by screwing onto rods (F). Note: remove the nipple if installing with one 6” rod only.
5. By measuring, determine correct number of links needed for proper hanging height. Using pliers, disconnect and discard remaining chain, then attach the chain to the **loop (E) and the loop on** canopy (D). Then carefully lace the fixture wires through the chain, **loop (E)** and the loop of canopy (D)**.**

CONNECTING THE WIRES (Fig. 2)

6. At this point, connect the electrical wire as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture’s ground wire to it. Otherwise, connect the fixture’s ground wire directly to the mounting plate using the green screw provided.

FINISHING THE INSTALLATION (Fig. 1)

7. Place canopy (D) over the mounting plate (A) and secure with screws (B).
8. Place the glass shade (H) and metal ring (K) over the socket and secure with socket ring (I) by using spanner (J) provided.
9. Install light bulb (not included) in accordance with the fixture’s specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

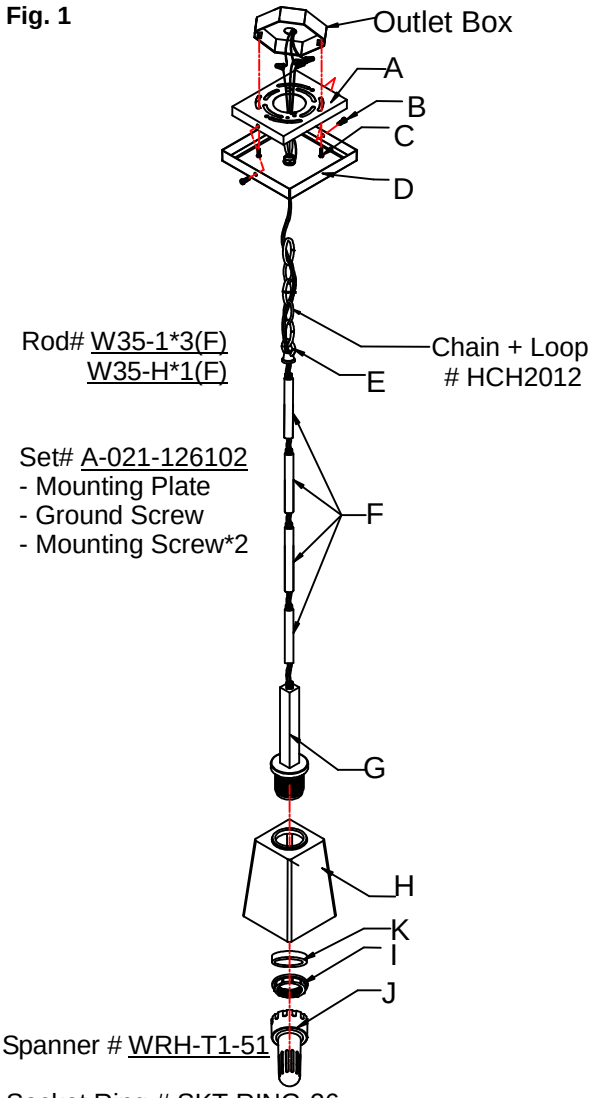

Fig. 2

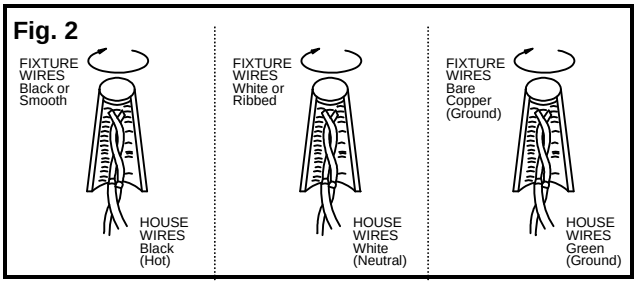
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green (Ground)

Intertek

american lighting association